



Slab Extractor PZ

For extracting single slabs, it has a robust construction so that the blades can be hammered into the joints.

► **New: Locking Device!**

The operator does not need to continually squeeze the SZ-handles together!

Adjustable without tools from 200 – 610 mm. Complete with easily exchangeable high-quality-special double spring-steel blades.

► Galvanised finish

Type	Gripping Range* W mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
PZ ^⓪	200 – 610 (7 ³ / ₄ – 24")	70 (155)	6 (13)	5320.0006

See page 4.1 for the paving block extractor SZ



Site Fence Base Handle BZSH

Move site fence bases quickly and ergonomically.

► Concrete or plastic site fence bases quickly reach a weight of 30 kg. Transporting them is awkward, takes a lot of strength and strains the back. With the BZSH site fence base handle, it is no longer necessary to bend down – this saves time and spares the back.


► Continuously adjustable adjustment bolts grip into the outer holes of the site fence base and catch there.

► With the adjustable handle, the site fence base hangs horizontally.

► Thin handle design for pushing into mesh boxes.

► With lifting eye for crane hook.

Type	Hole distance min./max. mm (in)	Working Load Limit WLL kg (lbs)	Dead Weight kg (lbs)	Order-Number
BZSH ^⓪	65/132 (2 ¹ / ₂ " / 5 ¹ / ₄ ")	35 (75)	5 (10)	5180.0084

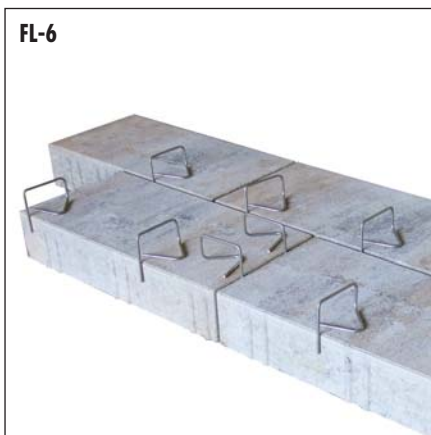

Joint Spacer FL

Proper spacing is essential when laying slabs. The new Joint Spacer FL from Probst achieves this simply and easily.

► Available for spacing of 6 mm, 8 mm and 10 mm.

► 2 of these practical little helpers are simply laid on each of the slabs which have already

been laid. As soon as the next slab is laid, the correct spacing is produced automatically.

► The Joint Spacers are then simply pulled out upwards by the bracket handle and are laid on the next slab.

► Protected from corrosion as they are made from stainless spring steel.

Type	Diameter ∅ (mm)	Dead Weight kg (lbs)	Packaging unit/ bag	Order-Number
FL-6	6 (1/4")	0.1 (0.2)	5 piece	5180.0086-001
FL-8	8 (1/4")	0.1 (0.2)	5 piece	5180.0087-001
FL-10	10 (1/2")	0.3 (0.7)	5 piece	5180.0088-001

⓪ Durable surface protection by galvanizing